


N 501 COMBI SUNBLIND ACTUATOR 4X SUNBLIND AC 230V,
6A 8X INPUT AC/DC 12-230V

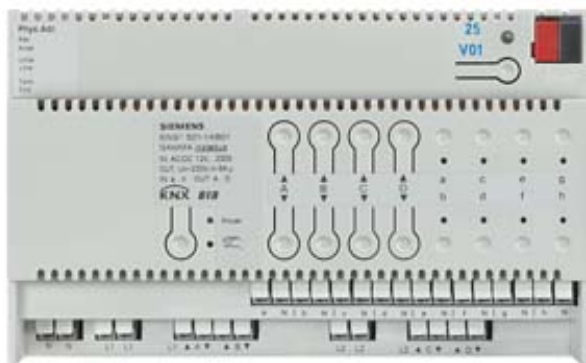

Similar to image

Technical data:

type of voltage		AC
Type of mounting		modular installation device
Bus system / usable / RF bus system		No
Bus system / usable / Powernet bus system		No
Bus system / usable / LON bus system		No
Number of pitch units for width		8
Number of inputs		8
Number of digital outputs / for shutter/blind control		4
Breaking capacity current	A	6
Product function / direct operation		Yes
Product component		
• Signaling contact		Yes
• integrated / Bus coupling		Yes
Type of display / LED		Yes
Bus system / can be used / EIB/KNX		Yes
Protection class IP		IP20

Certificates/approvals:

General Product
Approval

Declaration of Conformity



Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5WG1501-1AB01/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5WG1501-1AB01

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

[Datanorm](#) [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

last change:

Jul 1, 2013