


OVERVOLTAGE PROTECTION

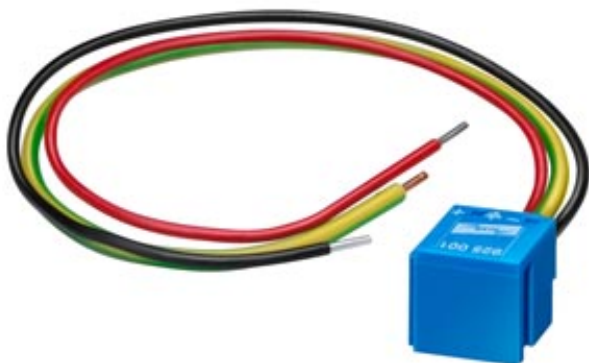

Similar to image

Technical data:

Type of mounting		others
Design of the electrical connection		others
Design of product / explosion-proof design		No
Product component / remote-signaling contact		No
Continuous operating voltage / with AC / maximum	V	24
Discharge current / at (8/20) µs / nominal value	A	5
Operating voltage		
• with DC / nominal value	V	24
Protection level		
• between PE and N and/or L	V	350
Signal design		without
Continuous operating voltage / with DC / maximum	V	24
Current carrying capacity / nominal value	A	6

Certificates/approvals:

**General Product
Approval**

Declaration of Conformity



Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5WG1190-8AD01/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5WG1190-8AD01

CAX-Online-Generator

<http://www.siemens.com/cax>

last change:

Oct 8, 2012