


AUXILIARY RELAY AR 1

AR 1 auxiliary relay converts a 24 Vac or 24 Vdc control signal into a potential-free contact output. AR 1 has one normally open contact 250V, 10A (res.). It loads the control signal with 20 mA (24 Vac).

Wiring

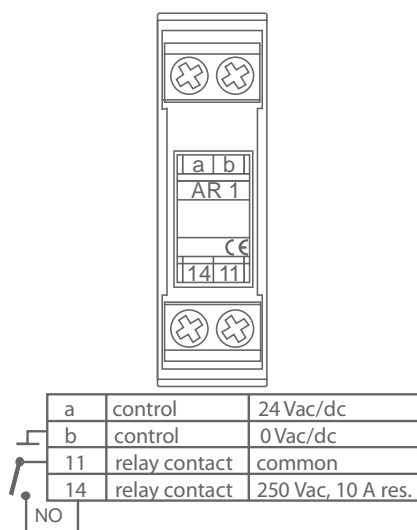

IMPORTANT: The device must be installed inside a suitable housing that cannot be opened without using tools.



Technical data:

Control signal	24 Vac, 0.5 VA 24 Vdc, 0.4 W
Output contact	250 Vac, 10 A res.
Housing	IP 20
Terminals	2,5 mm ²
Dimensions (w x h x d)	13 x 84 x 47 mm
Assembly	for 35 mm DIN-rail (inside a suitable housing)

Ordering guide:

Model	Product number	Description
AR 1	1183010	auxiliary relay with normally open (NO) contact

Products fulfill the requirements of directives 2006/95/EC and 2004/108/EC and are in accordance with the standards EN60730-1, EN61000-6-3 (Emission) and EN61000-6-2 (Immunity).