



AB series




DN 10–40

This range of high-quality solenoid valves is not dependent on a specific minimum differential pressure; the valves operate correctly with no pressure, at slight differential pressure, right through to maximum pressure.

They are therefore the valves of choice for installation in plants where differential pressures fluctuate greatly and are not possible to determine precisely in advance.

These solenoid valves are suitable for neutral liquids such as water, hydraulic oil, oils and greases.

Dimensioned drawings

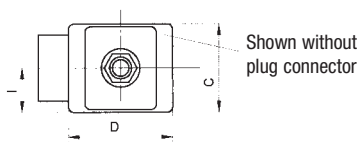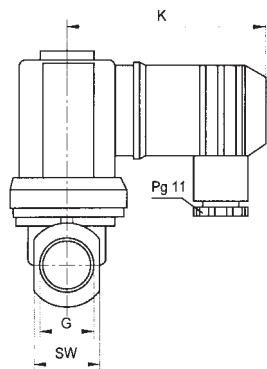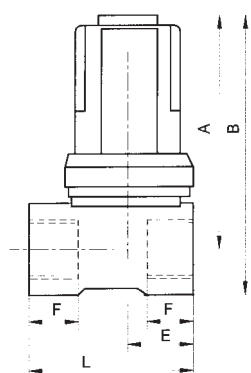

Technical data

Type

2/2-way

Operating mode

normally closed

Type of construction

Diaphragm solenoid valve, coupled. No initial pressure needed.

Pressure range

0 – 10 bar, also suitable for vacuum of up to -0.9 bar.

No back-pressure may occur as the valve will open in an uncontrolled manner.

Materials

Casing: brass, internal parts: stainless steel

Sealing material

Perbunan

Mounting position

Any, solenoid system preferably upright

Temperature of medium

-10°C to +90°C

Max. ambient temperature

55°C

Duty cycle

100% ED

Electrical connection

Device socket to DIN 43 650

Voltage / current type

Standard version 230 V, 50 Hz

Special voltages available

Voltage	Code
110 VAC	2
24 VAC	8
24 VDC	6

Degree of protection

IP 65 according to DIN 40 050 with device socket

Power consumption in VA or W

Switching state	Nominal diameter/DN					mm
	10	13	20	25	40	
AC: Start	34	36	38	160	202	VA
AC: Oper.	14	14	14	38	38	VA
DC: Start						
+ Operation	10	10	10	-	-	W

Product Summary

DN (mm)	Pressure range (bar)	k_{vs} value (m ³ /h)	Connection thread	Weight (kg)	Type
10	0–10	1.8	G 3/8"	0.4	AB 10
13	0–10	3.5	G 1/2"	0.55	AB 13
20	0–10	8.6	G 3/4"	1.0	AB 20
25	0–10	11.0	G 1"	1.7	AB 25
25	0–10	11.0	G 1 1/4"	1.7	AB 32
40	0–10	30.0	G 1 1/2"	3.5	AB 40
40	0–10	30.0	G 2"	3.5	AB 50

DN	A	B	C	D	E	F	G	K	L	M	SW
10	72	86	38	38	20	12	G 3/8"	65	50	3.5	27
13	83	99	45	51	24	14	G 1/2"	65	58	3.5	32
20	99	119	66	66	35	16	G 3/4"	65	80	3.5	41
25	145	166	105	105	69	18	G 1"	69	95	7	41
25	145	166	105	105	69	18	G 1 1/4"	69	95	7	50
40	157	187	105	105	69	22	G 1 1/2"	69	132	7	60
40	157	187	105	105	69	22	G 2"	69	132	7	70