



TTC25 is a controller for controlling 3-phase electric heating batteries. TTC25 is a controller which provides a high degree of versatility at a reasonable price.

- * The same unit for 3-phase 230V and 3-phase 400V. Automatic voltage adaption.
- * Can control both star-connected and delta-connected loads.
- * PI-control for constant supply air temperature control and P-control for room temperature control with automatic function adaption.
- * Minimum and maximum limits adjustable.
- * TTC25 is a complete controller for use with Regin temperature sensors.
- * TTC25X is controlled by a 0 - 10V signal from another controller.

Function

TTC25 is a 3-phase triac controller for controlling electric heating up to 25 A. It is made for DIN-rail mounting in an electric cabinet or other enclosure. TTC25 is to be connected in series between power-supply and an electric heater and can control both Y- and Delta- connected loads. TTC25 can also control assymetrical Delta-loads.

Function

The controller pulses the entire power output ON/OFF. The controller utilises time-proportional control, the ratio between On-time and Off-time is varied to fit the prevailing heating requirement. E.g. ON = 30 sec. and OFF= 30 sec. gives 50% output power. The cycle-time (the sum of on-time and off-time) is adjustable 6-60 sec.

This control accuracy contributes to reduced energy costs and to the increased comfort of an even temperature. Since the current is switched by semi-conductors (triacs) there are no moving parts that can wear out. As the current is switched at zero phase angle, network disturbance is eliminated.

TTC25 automatically adapt control mode to suit the dynamics of the controlled object.

Supply air temperature control

For rapid temperature changes, TTC25 will work as a PI-controller with a fixed proportional band of 20K and a fixed reset time of 6 minutes.

Room temperature control

For slow temperature changes, TTC25 will work as a P-controller with a fixed proportional band of 2K. When running room temperature control the supply air temperature can be maximum and/or minimum limited.

Controlling larger electric heaters

At larger loads TTC25 can be combined with step controller TT-S4/D or TT-S6/D. See under section 2.

TTC25X

This controller has to be controlled by a 0 - 10V signal from another controller.

Models

TTC25	Triac controller for Regin NTC sensors.
TTC25X	Triac controller for external signal 0-10 V DC only .

Technical data

General

Supply voltage	3-phase 210-255/380-415 V AC 50-60 Hz. Automatic adaption.
Power output	Maximum 25A/phase. Minimum 3A/phase. Both Y- and Delta- connected loads.
Ambient, running	0...40°C with no condensation. N.B. TTC25 generates 50W
Ambient, storage	-40 - +50°C.
Humidity	90% RH maximum.
Dimensions (w x h x d)	192 x 198 x 95 mm.
Form of protection	IP20
CE	This product conforms with the requirements of European EMC standards CENELEC EN 50081-1 and EN 50082-1, European LVD standards IEC 669-1 and IEC 669-2-1 and carries the CE mark.

Control unit parameters TTC25

Proportional band	(Supply air temperature control) 20K, fixed.
Reset time	(Supply air temperature control) 6 minutes, fixed.
Proportional band	(Room temperature control) 1,5 K, fixed.
Indicator	LED that is lit when power is pulsed to the heater.
Sensor inputs	Two (2) inputs for main sensor and maximum/minimum sensor. See Section 6-100 for choice of sensor. N.B. Max/min sensor must be 0...60°C.
Setpoint	Selectable, either internal setpoint potentiometer or external setting device.
Signal input	0 - 10V DC when running against other controllers.
Signal output	0-10 V connected to the output unit by wire strap (terminals 7-9).


Setting options

Setpoint	0 - 30°C, adjustable. The choice of sensor determines the controller setpoint range.
Minimum limits	0 - 30°C, adjustable.
Maximum limits	20 - 60°C, adjustable.
Cycle time	6 - 60 seconds, adjustable.
Night set-back	Possible by using Night Set-back unit NS/D , see datasheet section 1 position 325.

TTC25X

Input	Only for external input signal 0-10 V DC with adjustable cycling time. No internal control unit. No min- or maximum limiting, all other technical data as above.
-------	--

Dimensions and wiring

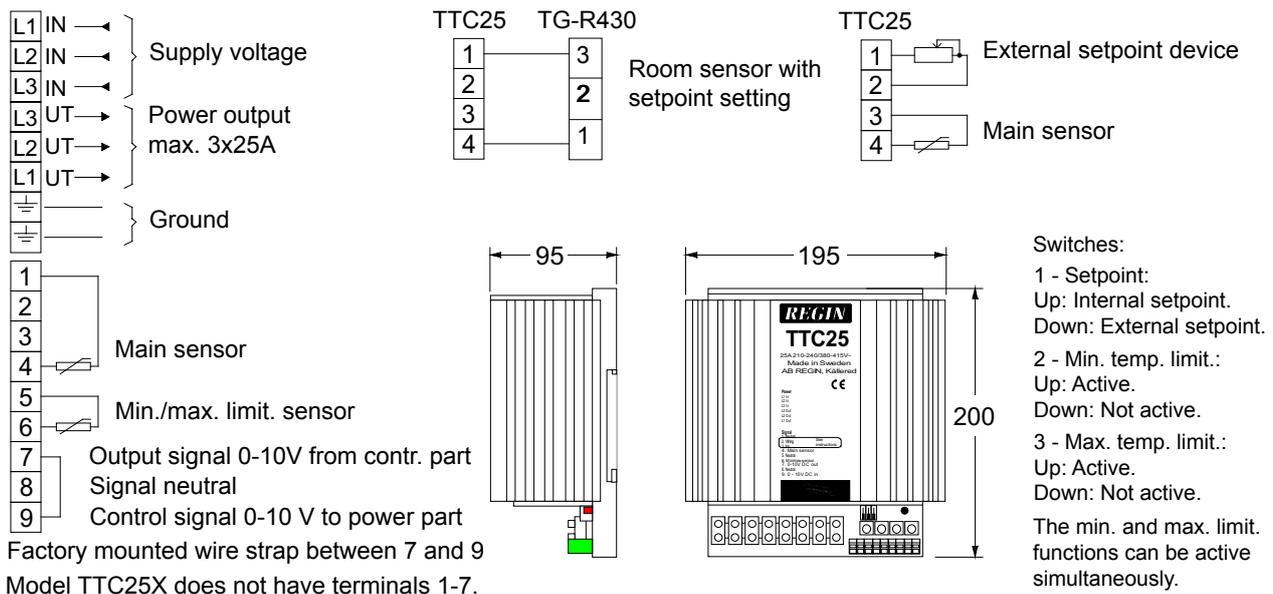

Head Office Sweden
 Phone: +46 31 720 02 00
 Web: www.regin.se
 Mail: info@regin.se

Sales Offices

France: +33 1 41 71 00 34	Hong Kong: +852 24 07 02 81
Germany: +49 30 77 99 40	Singapore: +65 67 47 82 33
Spain: +34 91 473 27 65	

REGIN
 THE CHALLENGER IN BUILDING AUTOMATION